

90100

90200

90100 9" Ford Modular Center .....1322.00  
Includes all studs, nuts and washers for end bells and center section, filler cap, vent and pump block off plate. Specify the thickness of the end bells or 4-link brackets to determine the proper end bell stud.

90200 12 Bolt Main Modular Center .....1247.00  
With all studs, nuts and washers for end bells, main caps, adjusters and cast rear cover with filler cap and vent. Specify the thickness of the end bells or 4-link brackets to determine the proper end bell stud.

## SOLID MOUNT AND 4-LINK BRACKETS

All modular brackets for solid mount applications are CNC machined from 7075-T6 billet aluminum plate. 1/2" brackets are pocket milled on both sides. Steel 4 link brackets are laser cut 1/4" 4130 and NC milled to mate to keyed spacers.

90012 1/2" Mount Bracket (12" Mod) (ea.) ....175.00

90115 5/16" Mount Bracket (ea.) .....166.00



90116 1/2" Mount Bracket (9" Mod.) (ea.) ....162.00

90117 1/2" Mount Bracket, Blank (ea.) .....155.00  
14" X 12", hole center is 3" in, semi-finished plate

90041 4-Link Bracket Adjustable Height (ea) ..175.00  
For 90039 shock mount, 1/4" thick 4130 material

90043-I 4-Link Bracket Fixed Height (ea) .....175.00  
1/4" 4130 material for 17-1/4" narrow 4-link centers

90039 Adjustable Coil Over Mount Kit .....117.50  
for the 90041 4-link bracket kit (pr)

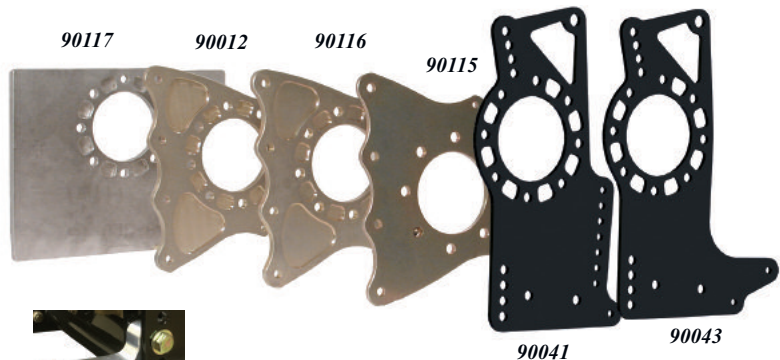

90039

## FLUID PUMP ASSEMBLY

Mark Williams 9" and 12" Modular rears are set up to accept a fluid pump to circulate rear end lubricant from the back of the housing forward to the pinion bearings and the gear contact area to extend bearing and ring and pinion life. Pump is driven off the rear of the pinion shaft. Pump assembly includes pump shaft, required fittings, braided hose, and fasteners.

91100 Pressure Lubrication Pump Assembly .....645.00  
Pump drive requires 3/8 hex in pinion shaft (see below).

91110 Broach Hex Drive in Pinion (labor only) .....138.00



91100

## SPACERS, SEALS & TAIL LIGHT

90108 Rear Cover for Tail Light .....42.00  
Replaces standard pump block off plate.

90127 End Bell Axle Seal .....10.20  
Fits into center casting before end bell is installed

96020 1/2" Thick Keyed Spacer (ea.) .....192.00  
Keyed spacers can be used to change 4 link centers and/or housing width on modular housings. Requires special studs.

96022 1" Thick Keyed Spacer (ea.) .....204.00  
Keyed spacers can be used to change 4 link centers and/or housing width on modular housings. Requires special stud

96022-XXX Special Thick Outboard Spacer (ea.) .....POA



96022-3375



96022-1000



90127



90108



90109